



## **Low-Quantum-Defect Solid State Lasers: 2-, 3-, or 4-level?**

**by Jeffrey O. White**

**ARL-RP-0298**

**August 2010**

**A reprint from the *IEEE Photonics Society News*, volume 23, number 4, August 2009**

## **NOTICES**

### **Disclaimers**

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

# **Army Research Laboratory**

Adelphi, MD 20783-1197

---

**ARL-RP-0298****August 2010**

---

## **Low-Quantum-Defect Solid State Lasers: 2-, 3-, or 4-level?**

**Jeffrey O. White**

**Sensors and Electron Devices Directorate, ARL**

*A reprint from the IEEE Photonics Society News, volume 23, number 4, August 2009*

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
<p>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p><b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>					
1. REPORT DATE (DD-MM-YYYY) August 2010		2. REPORT TYPE Reprint		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Low-Quantum-Defect Solid State Lasers: 2-, 3-, or 4-level?				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Jeffrey O. White				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: RDRL-SEE-O 2800 Powder Mill Road Adelphi, MD 20783-1197				8. PERFORMING ORGANIZATION REPORT NUMBER  ARL-RP-0298	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES A reprint from the <i>IEEE Photonics Society News</i> , volume 23, number 4, August 2009					
14. ABSTRACT The concept of three-level- and four-level-lasers was used early on to explain why it was easier to make the $\text{Nd}^{3+}$ ion lase than the $\text{Cr}^{2+}$ ion. Almost 50 years later, work on solid-state lasers has recently led to a quantitative definition of the concept. The new level parameters $\ell_0$ and $\ell_1$ defined here will provide an improved basis for comparing $\text{Nd}^{3+}$ , $\text{Cr}^{2+}$ , and other ions, e.g. $\text{Er}^{3+}$ , $\text{Yb}^{3+}$ , $\text{Ho}^{3+}$ , and $\text{Tm}^{3+}$ . $\ell_0$ and $\ell_1$ assign to a system of discrete energy levels a number, with a physical basis, that varies continuously between 2 and 4, in the same way that the Hausdorff and Rényi definitions yield non-integer dimensions for fractals. Together with the cross section, lifetime, etc., they help in the design of a laser by providing a basis for choosing the operating temperature, pump wave-length, and laser wavelength.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT  UU	18. NUMBER OF PAGES  10	19a. NAME OF RESPONSIBLE PERSON Jeffrey O. White
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (Include area code) (301) 394-0069

# Low-Quantum-Defect Solid State Lasers: 2-, 3-, or 4-level?

Jeffrey O. White

U.S. ARMY RESEARCH LABORATORY, 2800 POWDER MILL RD., ADELPHI, MD 20783-1197, JEFFREY.OWEN.WHITE@ARL.ARMY.MIL 301-394-0069

The concept of three-level- and four-level-lasers was used early on to explain why it was easier to make the  $\text{Nd}^{3+}$  ion lase than the  $\text{Cr}^{2+}$  ion. Almost 50 years later, work on solid-state lasers has recently led to a quantitative definition of the concept. The new level parameters  $\ell_0$  and  $\ell_1$  defined below will provide an improved basis for comparing  $\text{Nd}^{3+}$ ,  $\text{Cr}^{2+}$ , and other ions, e.g.  $\text{Er}^{3+}$ ,  $\text{Yb}^{3+}$ ,  $\text{Ho}^{3+}$ , and  $\text{Tm}^{3+}$ . Together with the cross section, lifetime, etc., they help in the design of a laser by providing a basis for choosing the operating temperature, pump wavelength, and laser wavelength.

The original distinction between three- and four-level-lasers addressed only the separation between the ground state and the lower laser level [1]. The terminology suffices if the levels are either well-separated or well-overlapped with respect to  $k_B T$ . The separation between the emitting levels was not an issue initially, because the upper pump levels were far above the upper laser level. This was because early solid-state lasers were pumped with arc lamps whose output spanned the visible spectrum. Most of the excess energy remained as heat, however, which resulted in thermal stresses and optical inhomogeneities. Now, the availability of high power diode lasers has made it possible to pump levels that are not so far above the upper laser level, and that relax to the upper laser level with high efficiency.

Even with today's more efficient diode laser pumping, however, the excess photon energy remains an issue. The recent development of high average power, high brightness solid-state-lasers has had to address this heat load (see sidebar). The 105 kW laser recently demonstrated by Northrop Grumman [2,3] uses a slab geometry to favor heat removal and minimize deleterious thermal gradients, and incorporates adaptive optics to compensate the residual aberrations and achieve a beam quality of three [4,5]. Efficient removal of heat due to a high surface to volume ratio has helped IPG Photonics develop the world's first 10 kW single-mode production fiber laser [6].

Another approach to minimizing the heat load is low-quantum-defect [7] pumping, where the separation between absorbing states should be as small as practical, and likewise for the emitting states. However, the search for systems with a low quantum defect inevitably leads from the ideal case of a four-level-system, down to a two-level system, unless the temperature drops accordingly. What are the implications for laser design? In a 2-level system (Fig. 1a), unless the upper energy level has a higher degeneracy, there can be no inversion in steady state, and thus no gain. In a 3-level laser where the ground

state is shared, as in the case of 694.3 nm emission from ruby, ground state absorption (GSA) at the laser wavelength implies a higher laser threshold (Fig. 1b). If the emitting levels are too close, electrons can be thermally excited from the upper laser level to the upper pump level, reducing the gain at  $\lambda_L$  and the absorption at  $\lambda_p$ . When the excited state is shared (Fig. 1c), one can expect to encounter saturation of the pump absorption. If the absorbing levels are too close, ions can be thermally excited from the ground state to the lower laser level, again reducing the gain at  $\lambda_L$  and the absorption at  $\lambda_p$ .

In an ideal 4-level laser, these issues are absent (Fig. 3d), but real lasers fall somewhere in between 2-level and 4-level, because the separation between absorbing levels is comparable to  $k_B T$ , or the separation between emitting levels is comparable to  $k_B T$ , or because the level alignments are sub-optimal (Fig. 3e).

Extraneous levels also play a role in all of the above cases because they indirectly modify the absorption at  $\lambda_p$  and the gain at  $\lambda_L$ . If an energy level is added in the middle of the absorbing states, it helps to depopulate the lower laser level, which increases the gain at  $\lambda_L$ , but it also depopulates the lower pump level, which reduces the absorption at  $\lambda_p$ . Similar issues arise when extraneous levels appear around the emitting levels.

The quasi-level terminology has arisen to describe intermediate situations that are unclear because of a combination of several levels that are directly involved in the optical transitions, extraneous levels that become populated but that are only indirectly involved, and multiple level spacings, some comparable to  $k_B T$ . In the last 10 years, there have been 280 papers that have used the terminology quasi-2 level, quasi-3, and quasi-4 in the title or abstract alone [8]. The interest in low-quantum-defect lasers has forced the issue of finding a figure of merit for a system of energy levels that (a) can compare 2-, 3-, and 4-level systems and everything in between, (b) is closely tied to physical quantities like gain, (c) is based on the level occupancies, taking into account thermal population of the lower laser level *and* of the upper pump level, and (d) helps to choose  $\lambda_L$ ,  $\lambda_p$ , and the operating temperature. A well-defined figure of merit, e.g. a level scale that varies continuously between two and four, would be a useful intuitive guide to have in mind when thinking about a laser. Can all of that be accomplished with one figure of merit? I believe that it can be done with two closely related figures of merit, called level parameters, derived below.

Using Er:YAG as an example, the  $^4I_{15/2}$  angular momentum state is split by the crystal field into a manifold of eight sublevels; the  $^4I_{13/2}$  is split into seven (Fig. 2). To reduce the quantum defect, one can pump *and* lase between the lowest two manifolds. Referring to Fig. 2,  $f_{dL}$  is the probability that an electron

is in a state that can emit a Laser photon, given that it's in one of the emitting levels.  $f_{ap}$  is the probability that an electron is in a state that can absorb a Pump photon, given that it's in one of the absorbing levels, etc. The optimum case would be where  $f_{ap} = f_{el} = 1$ , and  $f_{al} = f_{ep} = 0$ , however, the splittings are too small for that to be true at 300 K.

Consider a laser beam and a pump beam propagating through a medium e.g. Er:YAG, at temperature T, characterized by cross sections at  $\lambda_p$  and  $\lambda_L$ . The rate equation for the population density of the absorbing states,  $N_1$ , includes the conventional terms for absorption at  $\lambda_p$ , and emission at  $\lambda_L$ . To these, we add terms for emission at  $\lambda_p$  and absorption at  $\lambda_L$ .

$$\begin{aligned} \frac{dN_1}{dt} &= +\Phi_p\sigma_p(f_{ep}N_2 - f_{ap}N_1) \\ &\quad +\Phi_L\sigma_L(f_{el}N_2 - f_{al}N_1) + N_2W_{21} \\ \frac{dN_2}{dt} &= -\frac{dN_1}{dt} \end{aligned} \quad (1)$$

$\Phi_p(\Phi_L)$  is the pump (laser) photon fluence,  $\sigma_p(\sigma_L)$  is the cross section at  $\lambda_p(\lambda_L)$ .  $W_{21}$  is the relaxation rate from the emitting states  $N_2$  to  $N_1$ , typically equal to the spontaneous emission rate. The propagation equations show gain for  $\Phi_L(\Phi_p)$  to the extent that the upper laser (pump) level is occupied, and loss to the extent that the lower laser (pump) level is occupied.

$$\begin{aligned} \frac{d\Phi_L}{dz} &= \sigma_L(f_{el}N_2 - f_{al}N_1)\Phi_L \\ \frac{d\Phi_p}{dz} &= \sigma_p(f_{ep}N_2 - f_{ap}N_1)\Phi_p \end{aligned} \quad (2)$$

Eqns. (1) can be easily solved for  $N_1$  and  $N_2$  in steady state, and inserted into (2). By neglecting spontaneous emission, and considering the case that  $\Phi_L\sigma_L(f_{al} + f_{el}) \ll \Phi_p\sigma_p(f_{ep} + f_{ap})$  (transitions at  $\lambda_p$  much faster than transitions at  $\lambda_L$ ), which we can call the small signal regime, the propagation equation simplifies to

$$\frac{d\Phi_L}{dz} = \sigma_L N_{\text{tot}} f_0 \Phi_L, \quad \text{where } f_0 \equiv \frac{f_{el}f_{ap} - f_{al}f_{ep}}{f_{ap} + f_{ep}}. \quad (3)$$

$N_{\text{tot}}$  is the sum of  $N_1$  and  $N_2$ . The exponential gain coefficient for  $\Phi_L$  clearly has a factor involving level occupancies alone.

In the large signal regime, the transitions at  $\lambda_L$  are much faster than  $\lambda_p$ , which could obtain inside a laser cavity. In this case, the pump fluence decreases exponentially, and the laser fluence increases asymptotically according to

$$\frac{d\Phi_L}{dz} = \sigma_p N_{\text{tot}} f_1 \Phi_p, \quad \text{where } f_1 \equiv \frac{f_{el}f_{ap} - f_{al}f_{ep}}{f_{el} + f_{al}}. \quad (4)$$

The coefficient that couples  $\Phi_p$  and  $\Phi_L$  clearly has a factor involving level occupancies alone.

Eqns. (3) and (4) suggest the following definitions for level parameters  $\ell_0$  and  $\ell_1$ .

$$\ell_0 = 2(f_0 + 1) \quad \ell_1 = 2(f_1 + 1) \quad (5)$$

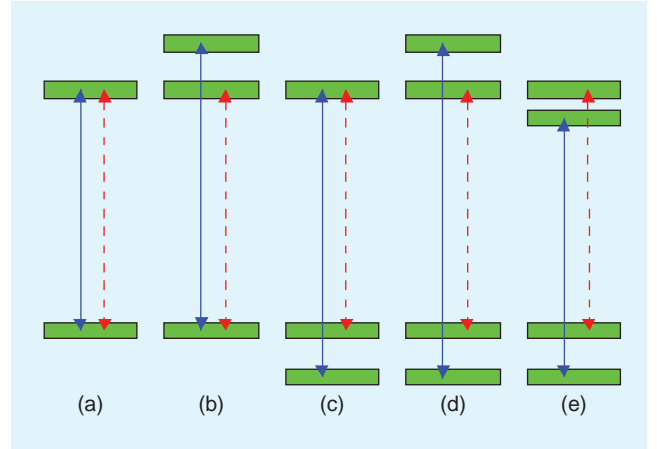


Figure 1. Different possibilities for two-, three-, and four-level lasers, showing pump (solid) and laser (dashed) transitions.

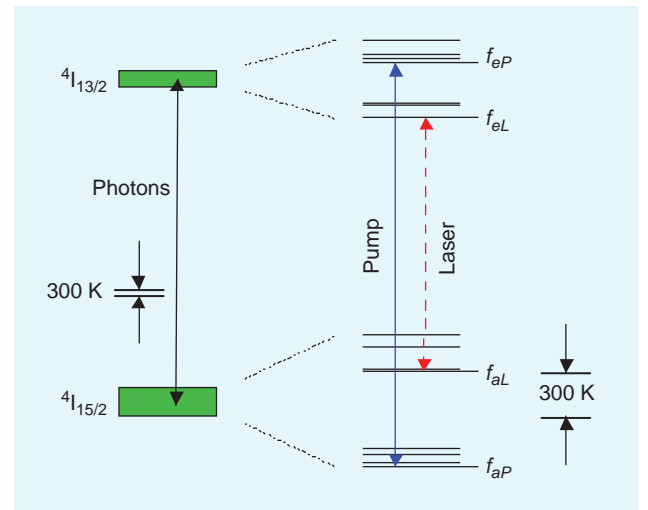


Figure 2.  $\text{Er}^{3+}$  ground state manifold and first excited state manifold. The scale on the right is magnified.

The level parameters are so-named because in the optimum 4-level case,  $\ell_0 = \ell_1 = 4$ . In the optimum 3-level case,  $\ell_0 = \ell_1 = 3$ , and in the 2-level case,  $\ell_0 = \ell_1 = 2$ . Other things being equal, in the small signal (amplifier) regime, a system with  $\ell_0 = 4$  will have twice the gain of a system with  $\ell_0 = 3$ . In the large signal (laser) regime, a system with  $\ell_1 = 4$  will have twice the coupling coefficient of a system with  $\ell_1 = 3$ .

Given the electronic energy levels of Er:YAG, and assuming a Boltzmann distribution in the absorbing states and the emitting states, one can easily calculate  $\ell_0$  and  $\ell_1$  as a function of temperature. For  $\lambda_p = 1470$  nm and  $\lambda_L = 1645$  nm, there is an 11% quantum defect and the system behaves like a 2.46-level laser at 300 K (Fig. 3). At high temperature,  $\ell_1$  approaches two, as one would expect. At low temperature,  $\ell_1$  increases to four.  $\ell_0$ , however, reaches an optimum at 130 K, and then goes to zero because the upper laser level is not the lowest in its manifold, and freezes out at low temperature. Of course, the absorption and emission cross sections will also change with temperature. However, other things being equal, 130 K would be the optimum temperature for an Er:YAG amplifier operating at these wavelengths.

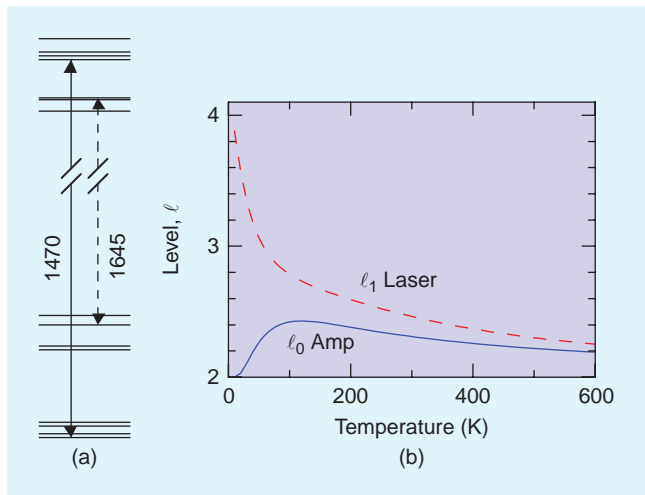


Figure 3. Er:YAG,  $\lambda_p = 1470$  nm,  $\lambda_L = 1645$  nm: (a) energy levels, pump transition (solid line), and laser transition (dashed line), (b) temperature dependence of the level parameters.

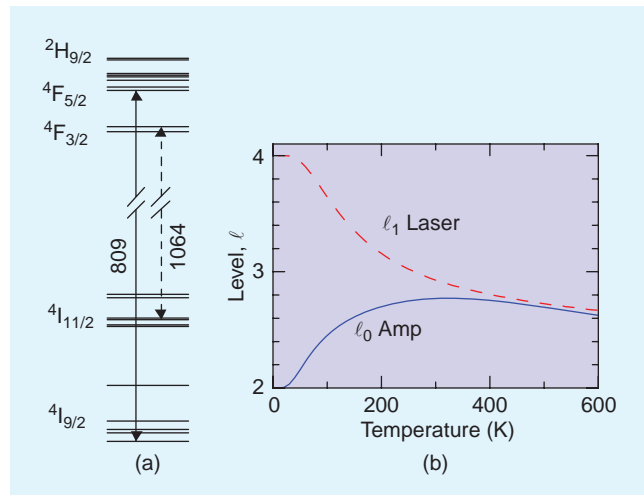


Figure 5. Nd:YAG,  $\lambda_p = 809$  nm,  $\lambda_L = 1064.1$  nm: (a) energy levels, pump and laser transitions, (b) temperature dependence of the level parameters.

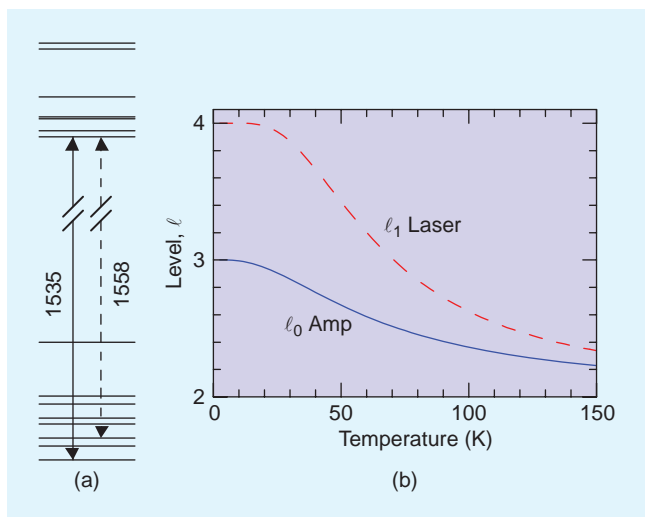


Figure 4. Er:Sc<sub>2</sub>O<sub>3</sub>,  $\lambda_p = 1535$  nm,  $\lambda_L = 1558$  nm: (a) energy levels, pump and laser transitions, (b) temperature dependence of the level parameters.

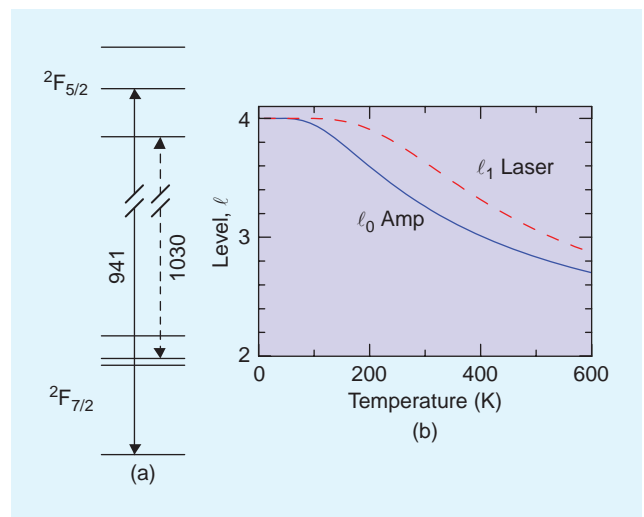


Figure 6. Yb:YAG,  $\lambda_p = 941$  nm,  $\lambda_L = 1030$  nm: (a) energy levels, pump and laser transitions, (b) temperature dependence of the level parameters.

In Er:Sc<sub>2</sub>O<sub>3</sub>, one can see that the level parameters approach their optimum values below  $\sim 25$  K (Fig. 4).

In the most common scenario for Nd:YAG, where  $\lambda_p = 809$  nm and  $\lambda_L = 1064$  nm, there is a 24% quantum defect. Although it has historically been considered a four-level laser, one can see that, at 300 K, the level parameters are closer to three (Fig. 5). This is because the occupation probability for the upper laser level is cut in half by the presence of the lower level of the  $^4F_{3/2}$  doublet, separated by only  $\sim 85$  cm<sup>-1</sup>. Based on this analysis, it appears that Nd does not deserve the 4-level ranking. Obviously, it does not mean that a good laser cannot be made from Nd, however, the mediocre level parameter has to be compensated by increased doping, or a higher cross section.

The Yb energy level structure is close to ideal because the level separations are good, the alignments are good, and there are no extraneous levels close to the upper laser level, or lower

pump level. For  $\lambda_p = 941$  nm,  $\lambda_L = 1030$  nm, the quantum defect is 9%. One can see that  $\ell_1 \sim 3.5$  at 300 K, and rises to close to four at 200 K (Fig. 6).

Using eleven pump and laser transitions in well-known rare-earth ions as examples, one can see that  $\ell_0$  and  $\ell_1$  span the range from two to four (Fig. 7). The systems that suffer from thermal population of the lower laser level or the upper pump level have higher level parameters at 80 K. The systems that rely on thermal excitation to populate the lower pump level or the upper laser level may have higher level parameters at 300 K.

The search for systems with a low quantum defect inevitably leads to a departure from the ideal case of a four-level-system. At some point, thermal population of either the upper pump level or the lower laser level will reduce the gain at  $\lambda_L$ , and reduce the absorption at  $\lambda_p$ . Ground state absorption at  $\lambda_L$  will become a factor, or absorption saturation at  $\lambda_p$ , or both.

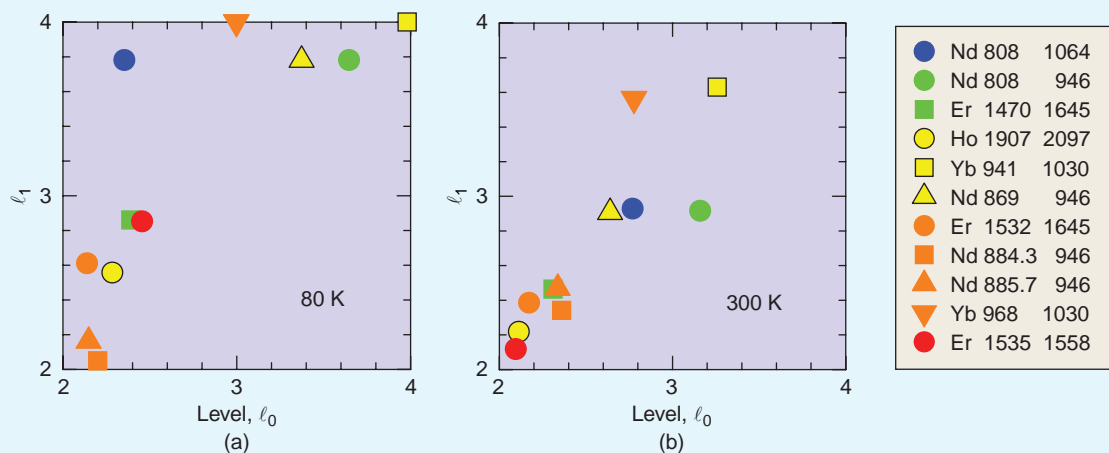


Figure 7.  $\ell_1$  vs  $\ell_0$  for a variety of known lasers at (a) 80 K and (b) 300 K. The color is keyed to the quantum defect. The host material is YAG in all cases, except in the last case, where the host is  $\text{Sc}_2\text{O}_3$ .

### Approaches to High-Average-Power Solid-State Lasers

There are several other techniques for dealing with the heat load in solid-state lasers. The thin disk laser operates in reflection so that it can have one entire face in contact with a heat sink, therefore a short thermal path. The cavity propagation axis is nearly normal to the surface, and thus parallel to the thermal gradients [9]. Radiation balancing compensates the heat deposited as a result of every stimulated emission by pumping to the red side of the fluorescence peak, so that the average

spontaneous emission removes heat [10]. Cryogenic lasers have attracted renewed interest because of improved thermal conductivity and an index less sensitive to temperature, as well as increased cross sections and reduced ground state absorption [11,12]. Fiber lasers can have efficient heat removal due to the high surface to volume ratio [6]. The heat capacity laser circumvents the heating problem by operating multiple slabs, each with a low duty cycle [13].

### Advances in Low-Quantum-Defect Pumping

In the most common configuration for diode-pumped Nd:YAG, five different manifolds are populated,  $\lambda_p = 808$  nm and  $\lambda_L = 1064$  nm, therefore the QD is 24% (see Table I). If the pumping and lasing transitions are chosen to be between levels in the same two manifolds, e.g. with  $\lambda_p = 869$  nm and  $\lambda_L = 946$  nm, the quantum defect can be reduced to 8%. Changing to  $\text{Yb}^{3+}$  can reduce the quantum defect to 6%. In these last two examples, the quantum defect is limited in part by the crystal field splitting.

In a host material with a low crystal field strength, e.g.  $\text{GdVO}_4$ , the QD can be reduced to 3%. In a recent experiment, a crystal of  $\text{Yb:GdVO}_4$  lased at 1,015 nm when longitudinally pumped with a Ti:sapphire laser at 984 nm [14]. The pump beam entered the cavity through

a dichroic mirror with high transmission at 984 nm and high reflectivity at 1015 nm. Although the slope efficiency could theoretically be as high as 97% in this case, the experimental result (output power vs incident power) was 32%. Use of  $\text{CaGdAlO}_4$  and non-collinear pumping has brought the QD in the 1  $\mu\text{m}$  region down to 0.8% [15,16].

In the eye-safer region, where Er:YAG lases at 1645 nm, pumping at 1470 nm reduces the quantum defect (QD) to 11% [17,18], compared to 41% when pumping at  $\sim 980$  nm. Pumping at 1532 nm further reduces the defect to 7%. A 1.5% QD laser recently demonstrated in Er: $\text{Sc}_2\text{O}_3$  at 77 K by pumping at 1535 nm and lasing at 1558 nm [19]. A volume Bragg grating was used for a dichroic input coupler.

The importance of low-quantum-defect lasers to the development of high power solid-state lasers has motivated a quantitative definition of the two-, three-, and four-level laser concept.

A simple definition is possible when a unique pump transition can be identified, e.g. when the pumping is by diode lasers. The level parameters  $\ell_0$  and  $\ell_1$  defined above should be



	$\lambda_p$ (nm)	$\lambda_L$ (nm)	Fractional QD	$\ell_0$	$\ell_1$
Er:YAG	1470	1645	0.106	2.2	2.5
"	1532	1645	0.069	2.2	2.4
Er:Sc <sub>2</sub> O <sub>3</sub>	1535	1558	0.015	2.1	2.1
Nd:YAG	808	1064.1	0.241	2.8	2.9
"	808	946	0.146	3.2	2.9
"	869	946	0.081	2.6	2.9
"	884	946	0.065	2.4	2.3
"	886	946	0.064	2.3	2.5
Yb:YAG	941	1030	0.086	3.3	3.6
"	968	1030	0.060	2.8	3.6
Yb:GdVO <sub>4</sub>	984	1015	0.029	*	*
Yb:CaGdAlO <sub>4</sub>	979	987.6	0.009	*	*
Ho:YAG	1907	2097	0.091	2.1	2.2

\* to be calculated

Table I. Fractional quantum defect, and level parameters, calculated for various gain media, and wavelengths, at 300 K.

particularly useful in these situations where (a) the quantum defect is comparable to  $k_B T$ , (b) where extraneous levels are present, and (c) where pumping is with narrow band light.

## References

1. A. Yariv and J. P. Gordon, "The Laser," *Proc. of the IEEE*, vol. 1, no. 1, pp. 4–29, Jan. 1963.
2. <http://www.globenewswire.com/newsroom/news.html?d=161575>
3. J. Marmo, et al., "Joint high power solid state laser program advancements at Northrop Grumman," *Proc. SPIE* vol. 7195, 719507 (6 pp.), 2009.
4. G. D. Goodno, et al., "Brightness-Scaling Potential of Actively Phase-Locked Solid-State Laser Arrays," *IEEE J. Sel. Topics in Quantum Elect.* vol. 13, no. 3, pp. 460–472, May/June 2007.
5. J. Hecht, "Ray guns get real," *IEEE Spectrum*, pp. 29–33, July 2009.
6. [http://www.ipgphotonics.com/Collateral/Documents/English-US/PR\\_Final\\_10kW\\_SM\\_laser.pdf](http://www.ipgphotonics.com/Collateral/Documents/English-US/PR_Final_10kW_SM_laser.pdf)
7. The quantum defect is the difference between the pump photon energy and the laser photon energy.
8. ISI Web of Knowledge, and INSPEC.
9. A. Giesen and J. Speiser, "Fifteen years of work on thin-disk lasers: Results and Scaling Laws," *IEEE J. Sel. Topics in Quantum Elect.* vol. 13, no. 3, pp. 598–609, May/June 2007.
10. S. R. Bowman, N. W. Jenkins, S. P. O'Connor, and B. J. Feldman, "Sensitivity and stability of a radiation-balanced laser system," *IEEE J. Quantum Elect.* vol. 38, no. 10, pp. 1339–1348, Oct. 2002.
11. D. C. Brown, "The Promise of Cryogenic Solid-State Lasers," *IEEE J. Sel. Topics in Quantum Elect.* vol. 11, no. 3, pp. 587–599, May/June 2005.
12. T. Y. Fan, et al., "Cryogenic Yb<sup>3+</sup>-Doped Solid-State Lasers," *IEEE J. Sel. Topics in Quantum Elect.* vol. 13, no. 3, pp. 448–459, May/June 2007.
13. K. N. LaFortune, et al., "Technical challenges for the future of high energy lasers," *Proc. SPIE* vol. 6454, pg. 64540O (11 pp.) 2007.
14. J. Petit, B. Viana, P. Goldner, D. Vivien, P. Louiseau, and B. Ferrand, "Laser oscillation with low quantum defect in Yb:GdVO<sub>4</sub>, a crystal with high thermal conductivity," *Opt. Lett.* vol. 29, no. 8, pp. 833–835, April 2004.
15. J. Petit, P. Goldner, and B. Viana, "Laser emission with low quantum defect in Yb:CaGdAlO<sub>4</sub>," *Opt. Lett.* vol. 30, no. 11, pp. 1345–1347, June 2005.
16. J. Petit, P. Goldner, B. Viana, J. Didierjean, F. Balembois, F. Druon, and P. Georges, "Quest of athermal solid state laser: case of Yb:CaGdAlO<sub>4</sub>," *conf proceedings*.
17. Y. E. Young, S. D. Setzler, K. J. Snell, P. A. Budni, T. M. Pollak, and E. P. Chicklis, "Efficient 1645-nm Er:YAG laser," *Opt. Lett.* vol. 29, no. NNN, pp. 1075–1077, Month 2004.
18. J. O. White, L. D. Merkle, M. Dubinskii, D. Garbuzov, and I. Khoudryashov, "Resonant pumping and upconversion in 1.6  $\mu$ m Er<sup>3+</sup> lasers," *J. Opt. Soc. Am. B* vol. 24, no. 9, pp. 2454–2460, Sept. 2007.
19. N. Ter-Gabrielyan, L. D. Merkle, A. Ikesue, and M. Dubinskii, "Ultralow quantum-defect eye-safe Er:Sc<sub>2</sub>O<sub>3</sub> laser," *Optics Lett.* vol. 33, no. 13, pp. 1524–1526, July 2008.

No. of Copies	Organization
1 ELEC	ADMNSTR DEFNS TECHL INFO CTR ATTN DTIC OCP 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218
1	US ARMY RSRCH LAB ATTN RDRL CIM G T LANDFRIED BLDG 4600 ABERDEEN PROVING GROUND MD 21005-5066
33	US ARMY RSRCH LAB ATTN IMNE ALC HRR MAIL & RECORDS MGMT ATTN RDRL CIM L TECHL LIB ATTN RDRL CIM P TECHL PUB ATTN RDRL SEE O J WHITE (30 COPIES) ADELPHI MD 20783-1197

Total: 35 (1 ELEC, 34 HCs)